



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 7/38		A2	(11) International Publication Number: WO 99/12376
			(43) International Publication Date: 11 March 1999 (11.03.99)
(21) International Application Number: PCT/FI98/00654		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 25 August 1998 (25.08.98)			
(30) Priority Data: 973579 1 September 1997 (01.09.97) FI			
(71) Applicant (for all designated States except US): NOKIA TELECOMMUNICATIONS OY [FI/FI]; P.O. Box 300, FIN-00045 Nokia Group (FI).			
(72) Inventor; and (75) Inventor/Applicant (for US only): RAUTIAINEN, Jaakko [FI/FI]; Tapiontie 5 A 5, FIN-90570 Oulu (FI).			
(74) Agent: PAPULA REIN LAHTELA OY; Fredrikinkatu 61 A, P.O. Box 981, FIN-00101 Helsinki (FI).			


Published

Without international search report and to be republished upon receipt of that report.

(54) Title: PROCEDURE FOR SETTING UP A CALL IN A WIRELESS LOCAL LOOP

(57) Abstract

Procedure for setting up a call in a wireless local loop, which is based on mobile communication technology and in which terminal units (TU) are connected via a radio link to an access node (AN) and from the access node to a wired network local exchange (LE) via a standard V5 interface and in which checking functions consistent with a mobile communication specification are carried out. To accelerate call setup, checking functions are carried out during voice mode connection of the call.

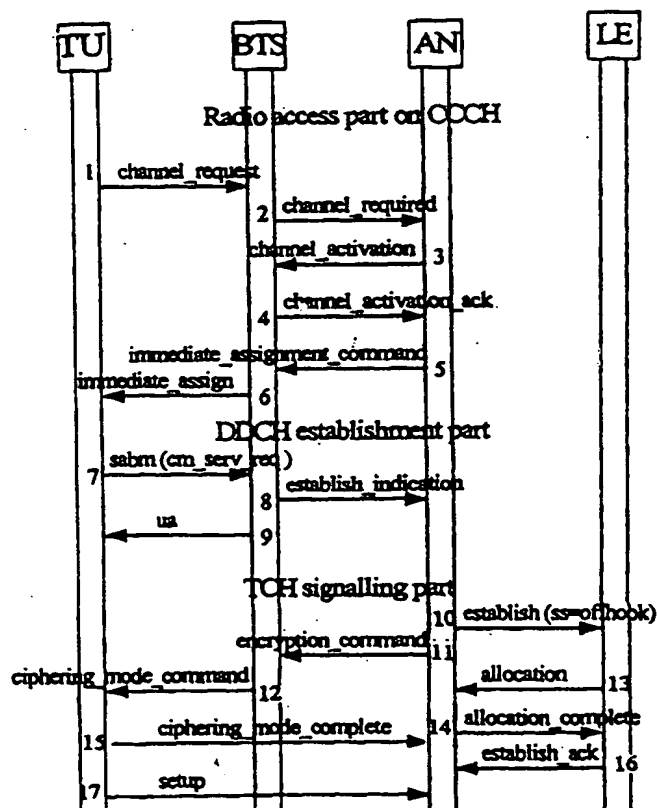

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Larvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

PROCEDURE FOR SETTING UP A CALL IN A WIRELESS LOCAL LOOP

The present invention relates to a procedure as defined in the preamble of claim 1.

5 In a wireless local loop (WLL, Wireless Local Loop or RLL, Radio in Local Loop), a terminal unit is connected via a wireless link to an access node (AN). The access node may consist of multiplexers, crossbar switches and various transmitting systems. The WLL
10 system may be based e.g. on technology used in mobile telephone systems, such as the GSM/DCS1800 technology (GSM, Global System for Mobile Communications; DCS, Digital Cellular System). GSM is a European digital mobile communication system standardised by ETSI. DCS-
15 1800 is a mobile communication system standardised by ETSI, which is based on the GSM specification and aims at a more effective use of microcells and which works in the frequency range of 1800 MHz. Between the terminal unit and the access node there is a base trans-
20 ceiver station, through which call signals received from the terminal unit over a radio channel are transmitted via the access node to a public telephone network and vice versa. The access node can be connected to the telephone exchange using e.g. a V5.2 protocol
25 consistent with the ETS 300 347-1 standard or a V5.1 protocol consistent with the ETS 300 324-1 standard. The access node functions as a converter between GSM signalling and V5 signalling.

During call setup in a local loop, various
30 checking functions related to network security management are carried out. The checking functions are designed to prevent illicit access to the network for users who have no right to use it, and to prevent the use of e.g. a mobile station reported stolen. The
35 checking operations defined by the GSM specifications, carried out during call setup, retard the call setup

process so that the V5 signalling time-outs are tripped and the call must be disconnected even though it is most likely to be successful. In a wireless local loop, fast setup of an outgoing call is particularly important.

An operation retarding call setup is e.g. change of the subscriber identity code (TMSI reallocation), which means changing the temporary subscriber identity code assigned for the subscriber by the visitor location register and allowing confidential subscriber identification e.g. during the call. Another check retarding call setup is the verification of the subscriber's access right, i.e. subscriber authentication, which means checking the subscriber data of a mobile station and preventing illicit access to the network. A third check retarding call setup is the verification of the subscriber's equipment identity code (IMEI check). To check the equipment identity code, it is compared with a register of equipment identity codes of mobile stations reported stolen and/or defective. IMEI is an international mobile station equipment identity code, by means of which a mobile station can be unambiguously identified.

Especially the time-outs in the PSTN protocol in the V5 interface (standard ETS 300 324-1 1 13) cause problems in call setup in a wireless local loop system. For instance, in the case of a terminating call, the time-out according to the V5 PSTN protocol between the start message and the acknowledgement message (the telephone rings) is max. 4 seconds (standard ETS 300 324-1 13.6).

The object of the present invention is to eliminate the drawbacks described above.

A specific object of the invention is to present a procedure that can be used to accelerate call setup so that unnecessary tripping of time-outs and needless disconnection of calls are avoided and the

time available for the signalling needed for the call setup itself is increased.

The procedure of the invention is characterised by what is presented in claim 1.

5 According to the invention, to accelerate call setup, checking functions are performed during voice mode connection of the call instead of being performed during call setup. The invention provides the advantage that more time is made available for the
10 signalling needed for call setup while possible tripping of time-outs and unnecessary disconnection of the call are avoided.

 In an embodiment of the procedure, subscriber's terminal units are connected to an access
15 node via a radio link consistent with the GSM specification and checking functions are carried out, said functions comprising change of the subscriber identity code (TMSI reallocation), verification of subscriber authenticity (authentication) and/or verification of
20 the subscriber's equipment identity code (IMEI check).

 In an embodiment of the procedure, the change of the subscriber identity code is TMSI reallocation consistent with the GSM 04.08 4.3.1. standard.

 In an embodiment of the procedure, the verification of subscriber authenticity is an authentication
25 consistent with the GSM 04.08. 4.3.2 standard.

 In an embodiment of the procedure, the verification of the subscriber's equipment identity code is an IMEI check consistent with the GSM 04.08. 4.3.3
30 standard.

 In an embodiment of the procedure, the V5 interface is a V5.2 interface consistent with the ETS
300 347-1 standard.

 In an embodiment of the procedure, the V5 interface is a V5.1 interface consistent with the ETS
35 300 324-1 standard.

The figure presents a signalling diagram representing a call originated by a terminal unit TU in a wireless local loop and substantially corresponding to a mobile-originated call MOC consistent with the GSM specifications. The system components in the diagram are a base transceiver station BTS, an access node AN, i.e. a node of an access network, and a local exchange LE.

The access node AN has three program segments called registers. These are an equipment identity register, an authentication register and, hierarchically above these, a visitor location register. The equipment identity register contains the international mobile station equipment identity numbers (IMEI). An equipment identity number may be placed on a white, grey or black list, and in response to an IMEI check the equipment identity register returns the list colour of the IMEI concerned. The authentication register produces the triplets needed in authentication and contains the data required for authentication. The functions of the visitor location register include making the decision about carrying out the checks.

In the GSM/DCS world, the following register terms are used: authentication centre AUC; AC, equipment identity register EIR and visitor location register VLR. In conjunction with a wireless local loop, the visitor location register is designated WFR (wireless fixed register).

Call setup in a wireless local loop in the so-called non-transparent mode as presented in the figure is substantially identical with call setup in a conventional GSM system. In a wireless local loop system, the access node AN also comprises functions that are included in the mobile switching centre/visitor location register MSC/VLR and home location register/authentication centre/equipment identity register (HLR/AC/EIR) of an ordinary GSM system. In a wireless

local loop, the subscriber terminal units communicate with the access node AN by radio. The signalling between the terminal unit and the access node AN is message based signalling consistent with the GSM specifications (GSM/DCS). The access node AN is connected to a wired network local exchange LE via a V5.2 interface consistent with the ETS 300 347-1 standard.

When the subscriber picks up the receiver, the terminal unit generates a local dial tone. The subscriber has a predetermined period of time to dial the first digit. The dial tone goes out as soon as the first digit has been dialled. The item numbers below correspond to the numbering in the figure.

1. Call setup is started upon the lapse of a predetermined period of time after the last digit has been dialled. The terminal unit TU requests a call by sending a CHANNEL REQUEST message to the base transceiver station BTS.

2. The base transceiver station BTS transmits a CHANNEL_REQUIRED message to the access node AN, which starts a search to find a communication channel.

3. After a communication channel has been successfully allocated, the access node AN activates the channel by sending a CHANNEL ACTIVATION message to the base transceiver station BTS.

4. The base transceiver station acknowledges activation by returning a CHANNEL ACTIVATION ACK message. The base transceiver station BTS starts transmission and reception on this channel using the power and timing data received in this message.

5. After the communication channel has been successfully activated, the access node AN sends an IMMEDIATE ASSIGNMENT COMMAND message to the base transceiver station BTS.

6. This message contains an IMMEDIATE ASSIGNMENT message, which the base transceiver station BTS sends to the terminal unit TU.

7. Having received the IMMEDIATE ASSIGNMENT message, the terminal unit TU is tuned to the specified communication channel and starts setting up a signalling link over the network. The terminal unit TU
5 sends a layer-2 SABM message to the base transceiver station BTS via the communication channel. The SABM contains a layer-3 service request message.

8. The base transceiver station sends the service request of the terminal unit further to the
10 access node AN in an ESTABLISH INDICATION message, which includes the subscriber's temporary mobile subscriber identity (TMSI) code.

9. The base transceiver station BTS acknowledges the SABM message by sending a UA frame to the
15 terminal unit TU.

10. The access node finds the subscriber's L3 address (using the TMSI and IMSI) and checks the state of the corresponding V5 interface. If call setup is allowed, the access node AN sends an ESTABLISH message
20 to the local exchange LE.

11. At the same time, the access node AN starts encryption by sending an ENCRYPTION COMMAND message to the base transceiver station BTS. The base transceiver station BTS analyses the command. If en-
25 cryption is needed, the base transceiver station BTS activates a demodulator for the deciphering of the encryption.

12. If encryption is used, the base transceiver station BTS sends a CIPHERING MODE COMMAND mes-
30 sage to the terminal unit TU.

13.-14. The local exchange LE sends to the access node AN an ALLOCATION message, which contains the time slot used in the V5.2 interface. The access node AN acknowledges this by sending an ALLOCATION
35 COMPLETE message to the local exchange LE.

15. After receiving the CIPHERING MODE COMMAND message, the terminal unit TU starts encryp-

tion deciphering and ciphering using an available ciphering key and returns to the base transceiver station BTS, in ciphered form, a CIPHERING MODE COMPLETE message or the next message it is to send. Upon receiving the CIPHERING MODE COMPLETE message (or any layer-2 frame correctly ciphered), the base transceiver station BTS starts encryption and transfers the message transparently to the access node AN.

16. When the local exchange LE is ready to receive a dialled number, it sends an ESTABLISH ACK message to the access node AN. A connection between the access node AN and the local exchange LE is set up and the speech path is connected through.

17. The terminal unit TU starts call setup by a SETUP message, which contains e.g. the number of the called subscriber and the call type (voice/data). The access node AN checks in the VLR/HLR database whether call setup is allowed for the subscriber. If the right conditions are fulfilled, then the access node AN sends the DTMF (dual tone multi-frequency) numbers (together with the V5 messages) to the local exchange LE.

18. Having sent the numbers, the access node sends a CALL PROCEEDING message to the terminal unit TU, indicating that the call is under processing.

19.-22. The channel mode is changed from signalling to voice via a "mode modify" procedure. First, the access node AN sends a MODE MODIFY message to the base transceiver station BTS to change the channel mode. Synchronisation by a transcoder begins. After receiving a MODE MODIFY ACK message, the access node starts the channel mode change process and sends a CHANNEL MODE MODIFY message to the terminal unit TU. This command is transparent to the base transceiver station BTS. Having received the CHANNEL MODE MODIFY message, the terminal unit TU changes the channel mode from signalling to voice and sends an acknowledgement

to the access node AN with a CHANNEL MODE MODIFY ACK message. This message, too, is transparent to the base transceiver station BTS.

23.-24. The terminal unit TU is set to voice
5 mode by sending a CONNECT message to it. The terminal unit TU acknowledges this by sending a CONNECT ACK message. The subscriber now hears the ring-back tone from the local exchange LE.

25.-26. If the visitor location register VLR
10 of the access node does not recognise the temporary TMSI code, then the international mobile subscriber identity IMSI is requested by an IDENTIFICATION REQUEST message. In response, an IDENTIFICATION RESPONSE message is sent to the terminal unit TU.

27. The access node AN starts authentication
15 by sending an AUTHENTICATION REQUEST message to the terminal unit TU.

28. The terminal unit TU sends a calculated
20 response in an AUTHENTICATION RESPONSE message to the access node AN.

The invention is not restricted to the examples of its embodiments described above, but many variations are possible within the scope of the inventive idea defined by the claims.

CLAIMS

1. Procedure for setting up a call in a wireless local loop, which is based on mobile communication technology and in which terminal units (TU) are connected via a radio link to an access node (AN) and from the access node to a wired network local exchange (LE) via a standard V5 interface and in which checking functions consistent with a mobile communication specification are carried out, characterised in that, to accelerate call setup, checking functions are carried out during voice mode connection of the call.

2. Procedure as defined in claim 1, characterised in that subscriber terminal units (TU) are connected to the access node via a radio link consistent with the GSM specification; and that checking functions are carried out, said functions comprising change of the subscriber identity code (TMSI reallocation), verification of the authenticity of the subscriber (authentication) and/or verification of the subscriber's equipment identity code (IMEI check).

3. Procedure as defined in claim 2, characterised in that the change of the subscriber identity code is a TMSI reallocation consistent with the GSM 04.08 4.3.1. standard.

4. Procedure as defined in claim 2 or 3, characterised in that the verification of subscriber authenticity is an authentication consistent with the GSM 04.08. 4.3.2 standard.

5. Procedure as defined in any one of claims 2 - 4, characterised in that the verification of the subscriber's equipment identity code is an IMEI check consistent with the GSM 04.08. 4.3.3 standard.

6. Procedure as defined in any one of claims 1 - 5, characterised in that the V5 inter-

face is a V5.2 interface consistent with the ETS 300 347-1 standard.

7. Procedure as defined in any one of claims
1 - 5, characterised in that the V5 inter-
5 face is a V5.1 interface consistent with the ETS 300 324-1 standard.

1/2

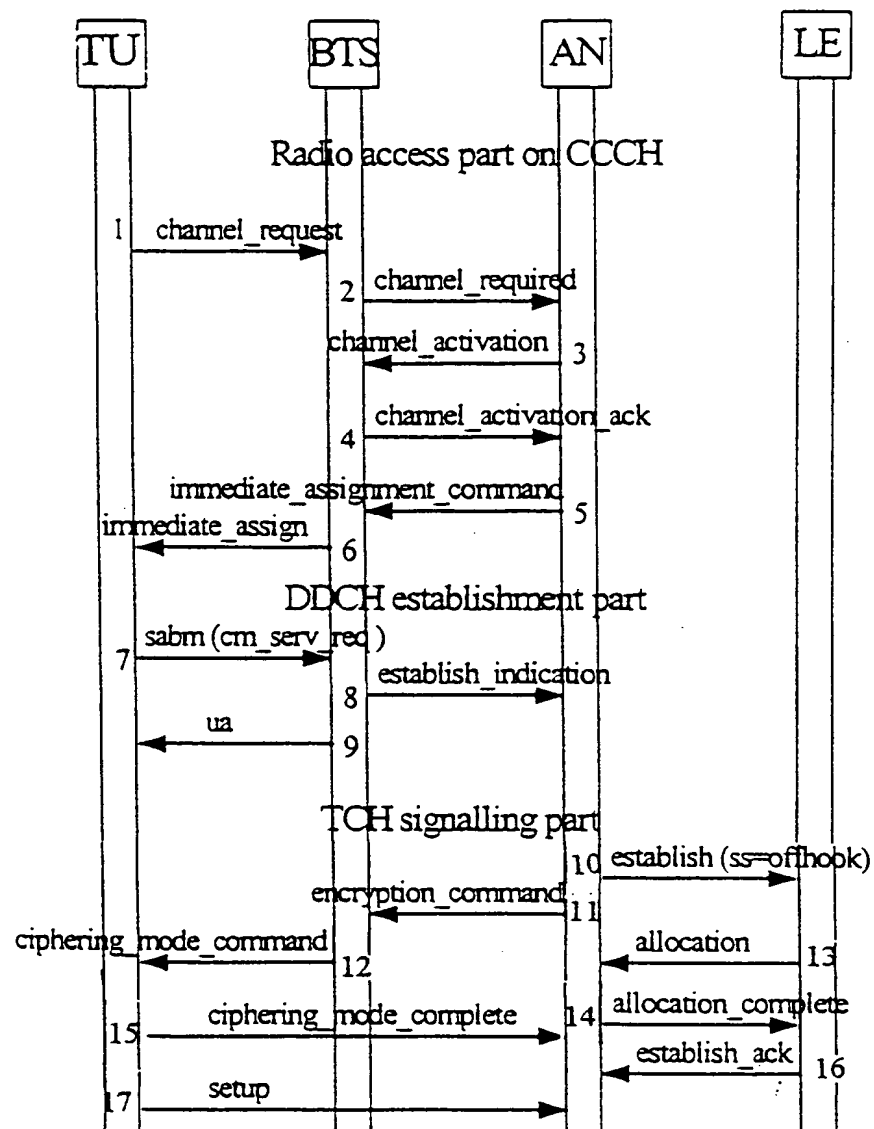


FIG. 1

This Page Blank (uspto)

2 / 2

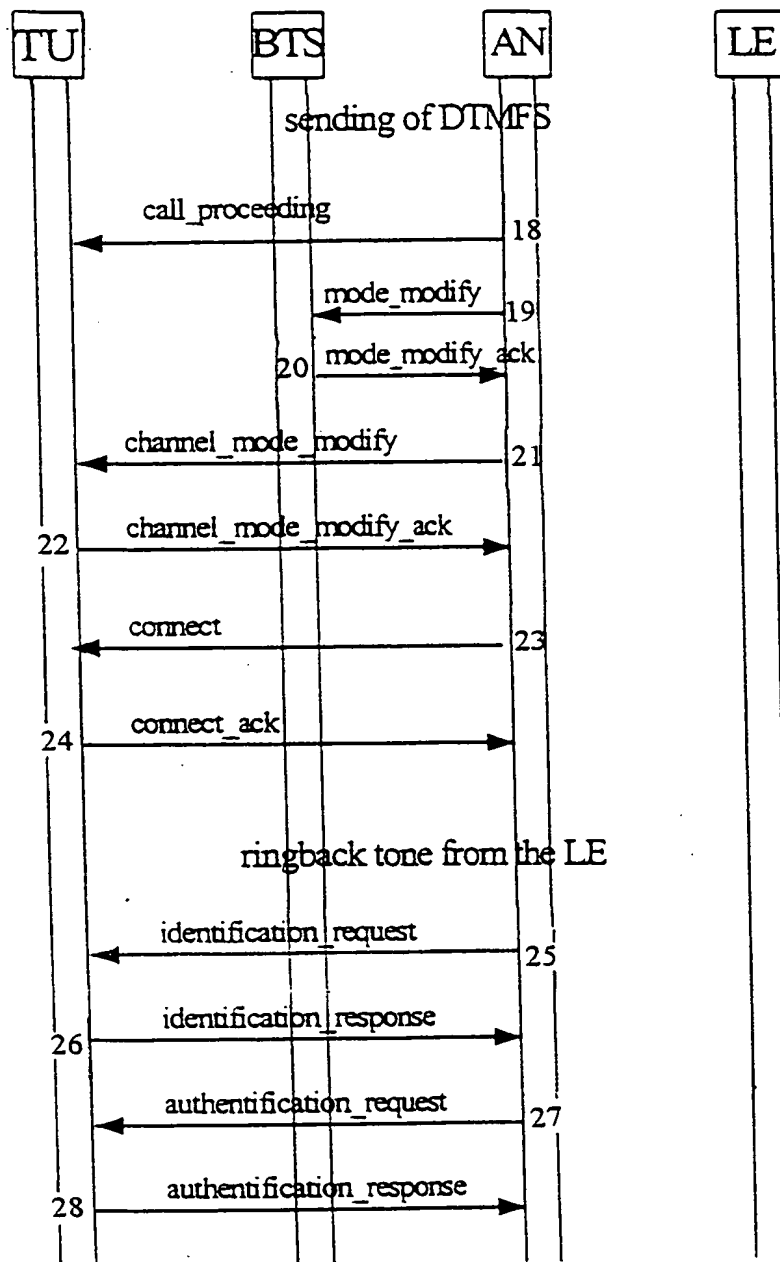


FIG. 2

This Page Blank (uspto)




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 7/20, 7/38		(11) International Publication Number: WO 99/12376
A3		(43) International Publication Date: 11 March 1999 (11.03.99)
(21) International Application Number: PCT/FI98/00654 (22) International Filing Date: 25 August 1998 (25.08.98) (30) Priority Data: 973579 1 September 1997 (01.09.97) FI (71) Applicant (for all designated States except US): NOKIA TELECOMMUNICATIONS OY [FI/FI]; P.O. Box 300, FIN-00045 Nokia Group (FI). (72) Inventor; and (75) Inventor/Applicant (for US only): RAUTIAINEN, Jaakko [FI/FI]; Tapiontie 5 A 5, FIN-90570 Oulu (FI). (74) Agent: PAPULA REIN LAHTELA OY; Fredrikinkatu 61 A, P.O. Box 981, FIN-00101 Helsinki (FI).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published With international search report. (88) Date of publication of the international search report: 10 June 1999 (10.06.99)

(54) Title: PROCEDURE FOR SETTING UP A CALL IN A WIRELESS LOCAL LOOP

(57) Abstract

Procedure for setting up a call in a wireless local loop, which is based on mobile communication technology and in which terminal units (TU) are connected via a radio link to an access node (AN) and from the access node to a wired network local exchange (LE) via a standard V5 interface and in which checking functions consistent with a mobile communication specification are carried out. To accelerate call setup, checking functions are carried out during voice mode connection of the call.

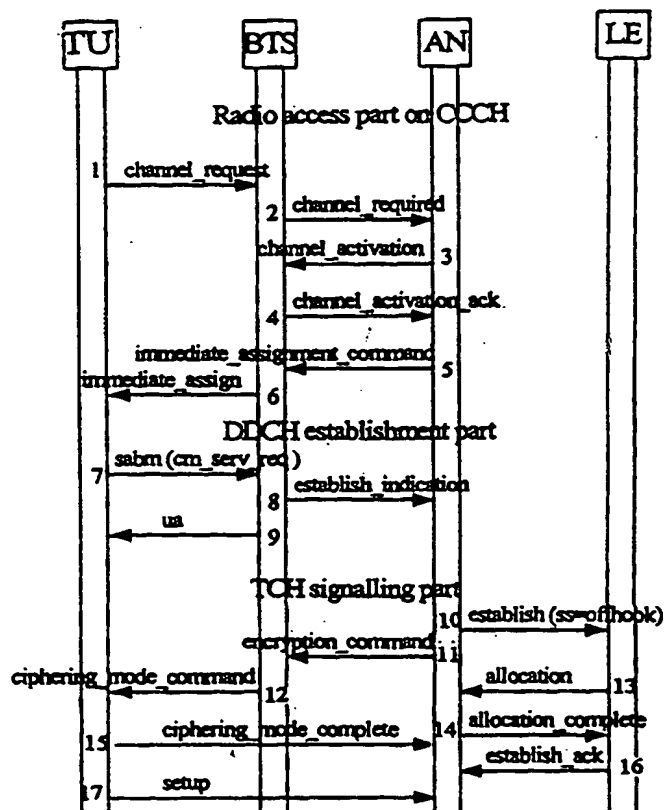

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 98/00654

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04Q 7/20, H04Q 7/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9720445 A1 (NOKIA TELECOMMUNICATION OY), 5 June 1997 (05.06.97), page 4, line 9 - line 13; page 7, line 23 - page 8, line 13; page 11, line 30 - page 12, line 15 --	1
A	EP 0769883 A2 (LUCENT TECHNOLOGIES INC.), 23 April 1997 (23.04.97), column 3, line 33 - line 43 --	6,7
A	WO 9524103 A2 (NOKIA TELECOMMUNICATIONS OY), 8 Sept 1995 (08.09.95), page 2, line 4 - page 3, line 33 --	1

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

5 March 1999

Date of mailing of the international search report

08 -03- 1999

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Peter Hedman

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 98/00654

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>Private Switching Systems and Networks, Second International Conf, Volume, 1992, (Birmingham, United Kingdom), J.C. Cook, R.L. Brewster, "CRYPTOGRAPHIC SECURITY TECHNIQUES FOR DIGITAL MOBILE TELEPHONES", page 123 - page 130, see the whole document</p> <p style="text-align: center;">-- -----</p>	2-5

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/FI 98/00654

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
WO	9720445	A1	05/06/97	AU	7575296 A	19/06/97
				CA	2238381 A	05/06/97
				EP	0862839 A	09/09/98
				FI	955675 A	25/05/97

EP	0769883	A2	23/04/97	CA	2188188 A	21/04/97
				GB	2306854 A,B	07/05/97
				GB	9521564 D	00/00/00
				JP	9233100 A	05/09/97
				US	5802177 A	01/09/98

WO	9524103	A2	08/09/95	AU	686332 B	05/02/98
				AU	1710895 A	18/09/95
				CN	1141713 A	29/01/97
				EP	0746952 A	11/12/96
				FI	97670 B,C	15/10/96
				FI	940857 A	24/08/95
				JP	9508515 T	26/08/97

This Page Blank (uspto)